

VersaTEK Small

LED Floodlight Series



Versatility by Design

The VersaTEK Small Flood is a durable, performance driven solution designed to meet the needs of both spec-grade and budget-conscious projects across Utility, Commercial, Industrial and Architectural applications.

Compact yet powerful, the VersaTEK Small Flood by LEOTEK provides up to 26,040 lumens and efficacies up to 179 LPW. Designed for durability, ease of installation, and field serviceability, the VTSFL supports both new construction and retrofit applications, replacing legacy 400W+ HID systems while reducing energy usage by 70% or more.

Two purpose-built optical platforms give designers ultimate flexibility. 5050 LED optics include NEMA 6x6 all-purpose flood and 3x3 spot distributions. While five precision 3535 LED flood optics, including a wall-grazer option allows designers to paint with light. With peak intensities reaching as high as 144,307 candela, the VTSFL excels in long-throw and precision-aimed project applications.

Versatile mounting options and contractor-friendly features simplify installation and maintenance. Tool-free access, an integral VersaKICK door kickstand, standard IK10 glass lens, and an optional removable Power Door help reduce labor time in the field.

Key Features, Details & Specs

- 4,357 to 26,040 delivered lumens with efficacies up to 179 LPW
- True 50-400+ watt HID replacement (70%+ energy savings)
- Yoke, trunnion & (3) slipfitter options available (including multiple wall mounts)
- Performance Selector option for field-adjustable output ranging from 30-100%
- LEOLink ILS™ Intelligent Lighting System & wireless 'NB01P' smart controller option
- Next-gen LED platform w/ 5050 LED NEMA & 3535 LED performance flood optics
- 2700K, 3000K, 4000K & 5000K CCT options available (including 80CRI options)
- Weighs only 21-24 lbs. for easy & safe single person installation
- Tool-free access with optional tool-free removable electrical 'Power Door'
- 10kV integral surge standard, 20kV extreme surge option available
- Entire luminaire & optical assembly is rated IP66
- 50°C (122°F) high-ambient rated standard for maximum electrical component life
- Impact resistant IK10 rated design with IK10 rated glass lens standard
- A360 die-cast low copper content alloy (< 0.6%) for max paint adhesion & life
- 5,000-hour salt spray finish standard (coastal finish available)
- 3G vibration rated suitable for high winds, overpasses, bridges, etc.
- Tested before & after rigorous 2-hour burn-in cycle
- BAA compliant, BABA option available, assembled in the USA (San Jose, CA)
- LEOTEK factory 10-year warranty is standard



'VTSFL-36A-YK' yoke mount

Typical Applications

Building Facades
Retail Storefronts
Structures & Monuments
Bridges & Infrastructure
Electrical Substations
Water Treatment Facilities
Rail, Storage, Intermodal Yards
Loading Docks

Integral Tool-Free Access Design

Tool-free electrical access & removable hinged door w/ integral VersaKICK fixed open door kickstand design for ease of installation or maintenance (hassle-free design compatible w/ most lineman safety gloves)




Hassle-Free Installation & Maintenance Features

Optional terminal block, slipfitter w/ self-centering 'star' design assists with leveling to a tenon and a UL recognized splice compartment ('SF' option splice compartment w/ 5-wire lead access & WAGOs for ease of installation, eliminates the need for a secondary j-box, compatible w/ 1-5/8", 2-3/8" & 3" O.D. tenons)



Tool-Free Removable Power Door Option

All serviceable electrical components mounted to a Power Door that is accessed & removable without tools in less than 15 seconds (undo MOLEX connectors, push two spring clips to unlock door, slide forward to remove)



VersaTEK Small LED Floodlight Series



VTSFL-72A-SF
slipfitter mount



VTSFL-72A-TR
trunnion mount



VTSFL-72A-YK
yoke mount

Ordering Information

Sample Catalog No. VTSFL-36A-MV-40K7-N66-GY-CF-P9-SFH-PCR7CR-TB-WL1-SP2-SF120-BABA

Product*	LED Code	Voltage	Color Temp CRI	Optical Distribution	Finish*	Performance Code*	Mounting Options
VTSFL VersaTEK Small Flood	36A 72A 36 or 72 LEDs Gen-A	MV 120-277V HV 347-480V	27K7 2700K, 70CRI 30K7 3000K, 70CRI 40K7 4000K, 70CRI 50K7 5000K, 70CRI 30K8 ¹ 3000K, 80CRI 40K8 ¹ 4000K, 80CRI 50K8 ¹ 5000K, 80CRI	N66 NEMA 6Hx6V Flood S33 NEMA 3Hx3V Spot NSP Narrow Spot RN Rectangular Narrow RM Rectangular Medium RW Rectangular Wide	BK Black DB1 Dark Bronze (RAL8019) WH White GY Gray CF Coastal Finish	P1 P2 P3 P4 P5 P6 P7 P8 P9* P10 *Consult factory for custom finish options, pricing & leadtimes.	SF ² SFH ³ P3 SFC ³ TR ³ YK ³ AWM AWMSC ASPM ARPM Slipfitter w/ Wire Leads (in UL splice compartment) Slipfitter w/ S/O Cord Exiting Housing Bottom (3-wire S/O cord, 16AWG, 4' exit length) Slipfitter w/ S/O Cord Exiting Center of Fitter (3-wire S/O cord, 16AWG, 4' exit length) Trunnion Mount (3-wire S/O cord, 16AWG, 4' exit length) Yoke Mount (3-wire S/O cord, 16AWG, 4' exit length) Adjustable Wall Mount (compatible w/ 3" & 4" square/octagonal recessed J-boxes) Adjustable Wall Mount w/ Surface Conduit J-Box Universal Square Pole Adjustable Arm Mount Universal Round Pole Adjustable Arm Mount

*If Build America, Buy America Act (BABA) compliance is required, please refer to 'BABA Domestic Build Option' located under 'General Options' and refer to footnote #15 for additional details.

*36A' is P9 max

Driver* & Control Options (*0-10V drivers are standard)	General Options
D4I ^{4,7} TLR4U ^{4,5,7} TLR4L ^{4,5,7} PCR7CR ^{4,9} SC LLPC ⁶ PS ⁷ PND1 ⁸ PND2 ⁸ PND3 ⁸ LEOLink ILS™ Intelligent Lighting System ⁹	AIM45 ¹⁰ SS TFL TB ² SP2 ¹¹ LSSP2 WL WL1 DSC PWRD SFXXX ¹² DFXXX ¹² 5WSO ¹³ SOXXYY ¹⁴ BABA ¹⁵
* See VTSFL specification sheet for LEOLink ordering & system details * (refer to LEOLink ILS specification sheets for complete specification & ordering information)	

1. 80CRI option only available in 3000K, 4000K & 5000K CCTs and may have longer leadtimes (contact factory).

2. TB Terminal Block is not available for use with the 'SF' Slipfitter mounting option. 3. Mounting option includes 16AWG 3-wire S/O cord w/ a 4' exit length & last 6" of insulation removed.

4. For full 100% D4I DALI functionality a 'PCR7CR', 'TLR4U' or 'TLR4L' must be selected w/ 'D4I' DALI driver option. DALI compatible mode or sensor (by others). 'D4I' DALI driver not compatible w/ 'NB01P05/10' smart controller.

5. 'TLR4U' & 'TLR4L' twist lock receptacle option requires 'D4I' DALI driver option to be selected.

6. 'LLPC' requires 'PCR7CR' option to be selected (does not ship installed, ships included w/ luminaire).

7. 'PS' Performance Selector enables field adjustable light output dimming control from specified Performance Code, not compatible with DALI driver option.

8. 'PND' options only available w/ 'MV' 120-277V (contact factory for 'HV' 347-480V availability).

9. 'NB01P05/10' requires 'PCR7CR' option, only available in 'MV' 120-277V (contact factory for 'HV' 347-480V). 'NB01P05/10' is a cellular based NEMA 7-PIN Smart Controller, RenAI subscription included, network data plan req'd (see spec sheet for details).

10. Slipfitter options 'SF', 'SFC', 'SFH' ship pre-aimed at 45° from the factory if 'AIM45' is specified.

11. 10kV/5kA surge, fail-to-on is included standard (SP1). 12. For single or double fusing, 'XXX' must specify required voltage.

13. '5WSO' only available with 'SFC', 'SFH', 'TR' & 'YK' mounting options. Not available w/ 'PCR7CR', 'PS', 'PND', 'D4I', 'TLR4U', 'TLR4L' options. 14. 'SOXXYY' option, 'XX' & 'YY' must specify S/O cord AWG & length (only available w/ SO cord mounting options).

15. 'BABA' option must be specified to meet Oct. 1, 2026 Build America, Buy America Act (BABA) guidelines. Failure to specify the 'BABA' ordering code will result in receiving non-BABA compliant product (w/ no recourse for an RMA, product exchange or refund).

Nominal Performance Data 4000K & 5000K, 5050LED

(36A, 5050LED, NEMA 6x6 optic, 70CRI, standard IK10 rated glass lens, 25°C ambient)

Performance Code	P1	P2	P3	P4	P5	P6	P7	P8	P9
Lumens ¹	5,198	6,706	8,702	9,595	10,977	12,317	13,615	14,871	16,086
System Wattage (W)	30	39	49	59	68	77	86	97	106
Efficacy (lm/W)	173	172	167	163	161	160	158	153	152
HID Replacement	50-100W	175W	200W		250W				350W


(72A, 5050LED, NEMA 6x6 optic, 70CRI, standard IK10 rated glass lens, 25°C ambient)

Performance Code	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10
Lumens ¹	13,227	14,710	16,177	17,630	19,068	20,491	21,900	23,295	24,675	26,040
System Wattage (W)	74	83	92	101	109	117	126	135	144	155
Efficacy (lm/W)	179	177	176	175	175	175	174	173	171	168
HID Replacement	250W			350W					400W+	

1. Normal tolerance ± 10% due to factors including distribution type, LED bin variance, driver variance and ambient temperatures.

'SF' Slipfitter Mount Dimensions*

(5-wire leads in UL splice compartment, shown w/ optional 'PCR7CR')

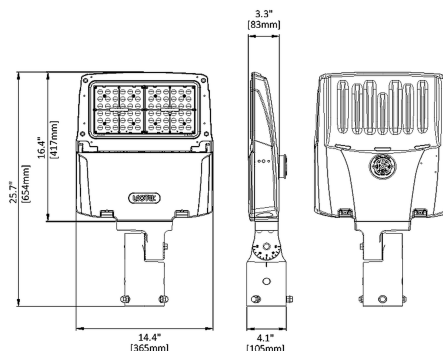

* Please refer to VersaTEK product specification sheets for additional ordering information & product details *