


GreenCobra™ LED Streetlight

GCL J-Series Specification Data Sheet

Luminaire Data

Weight 19 lbs [8.7 kg]
EPA 0.52 ft.²

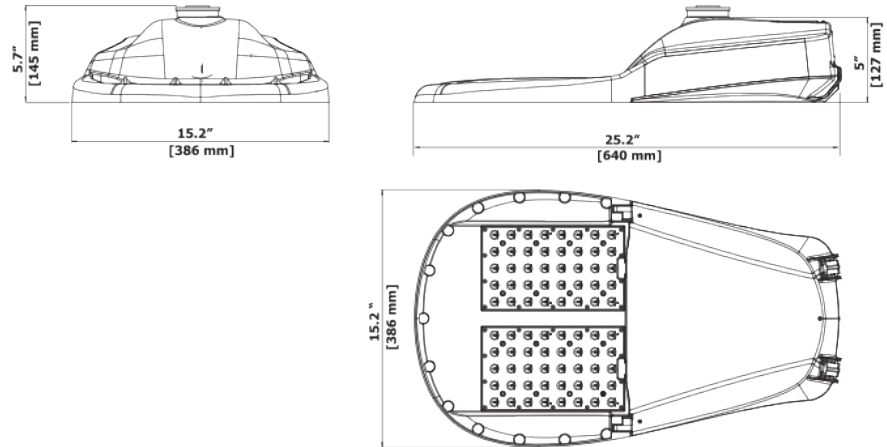

Ordering Information

Sample Catalog No. GCL1-80J-MV-30K-2S-GY-185-PCR7-CR-BABA

Model*	LED Code	Voltage	Color Temperature	Distribution	Finish ¹	Output Code ²	General Options
GCL1* GCL2* GCL3*	80J	MV 120-277V HV 347-480V	22K 2200K 27K 2700K 30K 3000K 40K 4000K 50K 5000K	2S Type 2 Short 2R Type 2 Medium 3R Type 3 Medium 3F Type 3F 4 Type 4 5 Type 5	GY Gray DB Dark Bronze BK Black	Refer to Page 3 to select the performance code.	FOC ³ Fixed Output Code LPCR Less Photocontrol Receptacle PCR7 ⁴ ANSI 7-wire Photocontrol Receptacle PCR7-CR ⁵ Control Ready 7-wire Photocontrol Receptacle 4B 4-Bolt Slip-Fitter RWG Rubber Wildlife Guard WL Utility Wattage Label BBL Bubble Level DSC Door Safety Cable CF ⁶ Coastal Paint Finish SP2 ⁷ Extreme Surge Protection, 20kV/10kA, Fail-to-on LSSP2 ⁷ Extreme Surge Protection, Fail-to-off, 20kV/10kA Rating BABA Domestic Build Option BABA ¹³ Build America, Buy America Act Compliant (meets Oct. 1, 2026 final US assembly, 55% content material requirements) LEOLink ILS™ Intelligent Lighting System™ ¹⁴ * See pg. 8 for additional LEOLink ordering & system details * (refer to LEOLink ILS specification sheets for complete specification & ordering information)

* Refer to performance data table on page 3 for specific model with corresponding output code

Notes:

- Gray, Black and Dark Bronze standard. Consult factory for other finishes. See page 2 for RAL codes of Standard finishes.
- Specified output code is the factory set lumen performance. Refer to performance data table on page 3 of this spec sheet. Field adjustable output selector enables fixture to be changed in the field to adjust light output for local conditions (not available with Fixed Output Code, FOC) or PCR7-CR option. Consult factory if wattage limits require a special drive current.
- Non-field adjustable, fixed output code. Specify required output code. Not available with PCR7-CR option.
- Includes output selector that enables field adjustability of light levels. Includes connectors to allow easy upgrade of wireless dimming via PCR7. Wireless node by others.
- Control-ready wired at factory for wireless node dimming (node by others). Output selector not included in the fixture. Not able to adjust above specified output code.
- Specify the CF Option for coastal installation. See warranty for details.
- Standard surge protection, 10kV/5kA, fail-to-on, meets enhanced surge protection based on ANSI 136.25-2015 3-part test.
- Flush mounted house side shield. Shield cuts light off at 1 mounting height behind luminaire. Same shield as H-Series product. Black color.
- Flush mounted cul-de-sac shield. Shield cuts light off at 1 mounting height behind luminaire and 2 times the mounting height on either side of luminaire. Same shield as H-Series product. Black color.
- Flush mounted front side shield cuts light off at approximately 11/2 mounting height in front of luminaire (street side). Same shield as H-Series product. Black color.
- Specify Color (GY, DB, BK). Refer to Leotek web site for specific mounting details and drawings at <https://leotek.com/lighting-library/>
- Specify MV (120-277V) or HV (347V-480V)
- The 'BABA' option must be specified to meet Oct. 1, 2026 Build America, Buy America Act (BABA) guidelines. Failure to specify the 'BABA' ordering code will result receiving non-BABA-compliant product (with no recourse for an RMA, product exchange, or refund).
- 'NB01P05/10' requires 'PCR7-CR' and is available in 'MV' 120-277V; contact factory for 'HV' 347-480V. A RenAI subscription and network data plan are required (see pg. 8 for details).

Accessories*

HSSGCL ⁸	House Side Shield, Snap-On*
CSSGCL ⁹	Cul-De-Sac Side Shield, Snap-On*
FSSGCL ¹⁰	Front Side Shield, Snap-On*
SPB ¹¹	Square Pole Horizontal Arm Bracket
RPB ¹¹	Round Pole Horizontal Arm Bracket
PTB ¹¹	Pole Top Tenon Horizontal Arm Bracket
PTB2 ¹¹	Pole Top Tenon Horizontal Arm Bracket (2@180°)
WB ¹¹	Wall Horizontal Arm Bracket
BSK	Bird Deterrent Spider Kit
LLPC ¹²	Long-Life Twist Lock Photocontrol
SC	Twist Lock Shorting Cap

*Unless specified for field installation, Shields are installed and Shorting Cap is included in the box. All other options are shipped separately.



Luminaire Specifications

Housing

Die cast aluminum housing with universal two-bolt slip fitter mounts to 1-1/4" to 2" (1-5/8" to 2-3/8" O.D.) diameter mast arm. One-piece aluminum housing provides passive heat-sinking of the LEDs and has upper surfaces that shed precipitation. Four-bolt mounting bracket (4B option) is available. Mounting provisions meet 3G vibration per ANSI C136.31-2010 Normal Application, Bridge & Overpass by independent test lab. Mounting has leveling adjustment from $\pm 5^\circ$ in 2.5° steps. All hardware is stainless steel. Electrical components are accessed without tools via die cast aluminum door with stainless steel quick release latches. Provided standard with removable polycarbonate wild life guard. For additional protection, optional rubber wildlife guard (RWG) which conforms snugly to the mast arm is offered.

Light Emitting Diodes

LEDs produce minimal 90% of initial intensity at 60,000 hours of life per IES recommended lumen maintenance life projection based on 6 times the duration of the collected LM-80 data. For details on IESNA Position on LED Product Lifetime Prediction, PS-10-18. LEDs have correlated color temperature of 2200 (22K), 2700K (27K), 3000K (30K), 4000K (40K), or 5000K (50K) and 70 CRI minimum. LEDs are ROHS compliant, 100% mercury and lead free.

Field Adjustability

LED lumen output can be changed in the field to adjust light output for local conditions (not available with PCR7-CR option). The specified output code will be the factory set output. Field adjustments can be made with the output selector included in the fixture. Field adjustable range shown in performance data table.

Quality Control

Every luminaire is performance tested before and after a 2-hour burn-in period. Assembled in the USA.

Optical Systems

Micro-lens optical systems produce IESNA Type 2, Type 3, Type 4, or Type 5 distributions and are fully sealed to maintain an IP66 rating. Luminaire produces 0% total lumens above 90° (BUG Rating, U=0). Optional house side shield cuts light off at 1/2 mounting height behind luminaire. Front side shield cuts light off at approximately one mounting height in front of the luminaire (street side). Cul-de-sac shield provides back and side light control for end of cul-de-sac applications. All shields are field installable without tools.

Electrical

Rated life of electrical components is 100,000 hours. Uses isolated power supply that is 0-10V dimmable. Power supply is wired with quick-disconnect terminals. EMC meets or exceeds FCC CFR Part 15. Terminal block accommodates 6 to 14 gauge wire. Surge protection complies with IEEE/ANSI C62.41 Category C High, 10kV/5kA and ANSI C136.2-2015, 3-part test.

Power Supply

IP66 rated power power supply with high power factor of > 90%. Auto sensing universal AC input from 120 to 277VAC (MV model) and 347 to 480VAC (HV mode) rated for both line to line and line to neutral applications. Maximum THD rating of 20%. Class 1 or Class 2. Built-in overheating protection mechanism will reduce drive current to LEDs and electrical components if the driver experiences unusual internal overheating situation. Built-in short circuit, voltage overload, and current overload protection with automatic recovery after correction.

LEOLink Intelligent Lighting System

ANSI C136.41 7-wire smart wireless controllers enable real-time monitoring and asset management when the luminaire is ordered with the 'PCR7-CR' option and an 'NB01P05/10' controller. RenAI supports remote monitoring, fault detection, energy data, schedules and performance control over standard 4G/5G IoT networks. A RenAI subscription and cellular data plan are required. See page 8.

Finish

Housing receives a durable, fade-resistant polyester powder coat finish with 3.0 mil nominal thickness. Standard finish tested to withstand 5000 hours in salt spray exposure per ASTM B117 and Coastal Finish per ASTM G85. Finish meets scribe creepage rating 8 per ASTM D1654. Finish tested 500 hours in UV exposure per ASTM G154 and meets ASTM D523 gloss retention.

Listings/Ratings/Labels

luminaires are UL listed for use in wet locations in the United States and Canada. DesignLights Consortium™ qualified product. Consult DLC QPL to confirm your specific fixture selection is DLC approved. All electronic components inside of the luminaire are NRTL damp location rated per ANSI 136.37-2011 Ingress Protection standard. International Dark Sky Association listed. Luminaire is qualified to operate at ambient temperatures of -40°C to 40°C. Assembled in the U.S.A

Photometry

luminaires photometrics are tested by certified independent testing laboratories in accordance with IES LM-79 testing procedures.

Warranty

10-year limited warranty is standard on luminaire and components. LEOLink Controllers can be specified with either 5-year or 10-year limited warranties. See LEOTEK.com for warranty details, terms and conditions.

Vandal Resistance

Housing and optics rated to IK10

Government Procurement Compliance

BAA- Buy America(n) Act: All LEOTEK luminaires qualify as a "Domestic End Product" per the Buy American Act as governed by FAR and DFARS.

BABA- Build America Buy America: All LEOTEK luminaires ordered with the 'BABA' option code are compliant per the Federal Highway Administration (FHWA).

Certification and Compliance

Luminaire complies with:
ANSI: C136.2, C136.3, C136.10, C136.13, C136.15, C136.22, C136.31, C136.35, C136.37, C136.41, C62.41, C78.377, C82.77
Other: FCC 47 CFR, IEC 60598, ROHS II, UL 1449, UL 1598

Color Specifications

Order Code	Color	RAL #	Pantone Equivalent
GY	Gray	7040	429C
BK	Black	9004	426C
DB	Dark Bronze	6022	BLACK 2C

TM21 Lumen Maintenance per IES TM21-11 Calculation

Model Number	60,000 Hours*	80,000 Hours	100,000 Hours
GCL1/2 80J	>98%	>98%	>98%
GCL3 80J	>95%	>94%	>93%

*Calculation based on IES position statement on Lumen Maintenance Life Projections

Performance Data: 2200K (22K)

All data nominal. IES files for all CCTs available at leotek.com.

Product	LED Code	Output Code	System Wattage (W)	Delivered Lumens (Lm)	Efficacy (Lm/W) ¹	Field Adjustable Output Range
GCL1	80J	155	123	15499	126	↕
		165	132	16437	125	
		180	146	17810	122	
		185	153	18427	120	
		200	171	20155	118	
GCL2	80J	190	161	19123	119	↕
		200	173	20153	116	
		210	183	21086	115	
		220	193	21885	113	
		230	206	22847	111	
GCL3	80J	235	214	23399	109	↕
		245	230	24614	107	

Notes:

1. Nominal lumens. Normal tolerance $\pm 10\%$ due to factors including distribution type, LED bin variance, and ambient temperatures.
2. Maximum LED drive current is 1050mA.

Performance Data: 2700K (27K)

All data nominal. IES files for all CCTs available at leotek.com.

Product	LED Code	Output Code	System Wattage (W)	Delivered Lumens (Lm)	Efficacy (Lm/W) ¹	Field Adjustable Output Range
GCL1	80J	175	123	17687	144	↕
		190	132	18758	142	
		205	146	20325	139	
		210	153	21029	137	
		230	171	23002	135	
GCL2	80J	220	161	21823	136	↕
		230	173	22999	133	
		240	183	24064	131	
		250	193	24975	129	
		260	206	26074	127	
GCL3	80J	270	214	27108	127	↕
		285	230	28516	124	
		300	248	29932	121	

Notes:

1. Nominal lumens. Normal tolerance $\pm 10\%$ due to factors including distribution type, LED bin variance, and ambient temperatures.
2. Maximum LED drive current is 1050mA.

Performance Data: 3000K (30K)

All data nominal. IES files for all CCTs available at leotek.com.

Product	LED Code	Output Code	System Wattage (W)	Delivered Lumens (Lm)	Efficacy (Lm/W) ¹	Field Adjustable Output Range
GCL1	80J	185	123	18338	149	
		195	132	19448	147	
		210	146	21073	144	
		220	153	21803	143	
		240	171	23848	139	
GCL2	80J	225	161	22626	138	
		240	173	23845	138	
		250	183	24949	136	
		260	193	25894	134	
		275	206	27033	131	
GCL3	80J	285	214	28535	133	
		300	230	30017	131	
		315	248	31507	127	
		325	260	32603	125	

Notes:

1. Nominal lumens. Normal tolerance $\pm 10\%$ due to factors including distribution type, LED bin variance, and ambient temperatures.
2. Maximum LED drive current is 1050mA.

Performance Data: 4000K (40K) and 5000K (50K)

All data nominal. IES files for all CCTs available at leotek.com.

Product	LED Code	Output Code	System Wattage (W)	Delivered Lumens (Lm)	Efficacy (Lm/W) ¹	Field Adjustable Output Range
GCL1	80J	190	123	19209	156	
		205	132	20350	154	
		220	146	22216	152	
		230	153	23129	151	
		255	171	25504	149	
GCL2	80J	235	161	23667	147	
		250	173	25229	146	
		265	183	26444	145	
		275	193	27567	143	
		295	206	29252	142	
GCL3	80J	305	214	30689	143	
		325	230	32646	142	
		345	248	34372	139	
		355	260	35633	137	

Notes:

1. Nominal lumens. Normal tolerance $\pm 10\%$ due to factors including distribution type, LED bin variance, and ambient temperatures.
2. Maximum LED drive current is 1050mA.

BUG Ratings: 2200K (22K)

All data nominal. IES files for all CCTs are available at leotek.com.

Product & LED Code	Output Code	Type 2R	Type 2S	Type 3F	Type 3R	Type 4	Type 5
		BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating
GCL1 80J	155	B3-U0-G3	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G2
	165	B3-U0-G3	B3-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G2
	180	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	185	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	200	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
GCL2 80J	190	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	200	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	210	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	220	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	230	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
GCL3 80J	235	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	245	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B4-U0-G3	B4-U0-G2

BUG Ratings: 2700K (27K)

All data nominal. IES files for all CCTs are available at leotek.com.

Product & LED Code	Output Code	Type 2R	Type 2S	Type 3F	Type 3R	Type 4	Type 5
		BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating
GCL1 80J	175	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	190	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	205	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	210	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	230	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
GCL2 80J	220	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	230	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	240	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G3	B4-U0-G2
	250	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G3	B5-U0-G3
	260	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G3	B4-U0-G3	B5-U0-G3
GCL3 80J	270	B3-U0-G3	B3-U0-G2	B3-U0-G4	B3-U0-G3	B4-U0-G3	B4-U0-G3
	285	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G3	B4-U0-G3	B5-U0-G3
	300	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G3	B4-U0-G3	B5-U0-G3

BUG Ratings: 3000K (30K)

All data nominal. IES files for all CCTs are available at leotek.com.

Product & LED Code	Output Code	Type 2R	Type 2S	Type 3R	Type 3F	Type 4	Type 5
		BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating
GCL1 80J	185	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	195	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	210	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	220	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	240	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G3	B4-U0-G2
GCL2 80J	225	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	240	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	250	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G3	B5-U0-G3
	260	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
	275	B3-U0-G3	B4-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
GCL3 80J	285	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
	300	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
	315	B3-U0-G3	B4-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B5-U0-G3
	325	B4-U0-G4	B4-U0-G3	B4-U0-G4	B3-U0-G4	B4-U0-G4	B5-U0-G3


BUG Ratings: 4000K (40K) and 5000K (50K)

All data nominal. IES files for all CCTs are available at leotek.com.


Product & LED Code	Output Code	Type 2R	Type 2S	Type 3R	Type 3F	Type 4	Type 5
		BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating	BUG Rating
GCL1 80J	190	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	205	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	220	B3-U0-G3	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	230	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	255	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
GCL2 80J	235	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G2
	250	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G3	B5-U0-G3
	265	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
	275	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G3	B5-U0-G3
	295	B3-U0-G3	B4-U0-G3	B4-U0-G4	B3-U0-G4	B4-U0-G4	B5-U0-G3
GCL3 80J	305	B3-U0-G3	B4-U0-G3	B3-U0-G3	B3-U0-G4	B4-U0-G4	B5-U0-G3
	325	B3-U0-G4	B4-U0-G3	B4-U0-G4	B3-U0-G4	B4-U0-G4	B5-U0-G3
	345	B3-U0-G4	B4-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B5-U0-G3
	355	B3-U0-G4	B4-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B5-U0-G3

Optical Distribution


(Each square block represents one mounting height, MH)

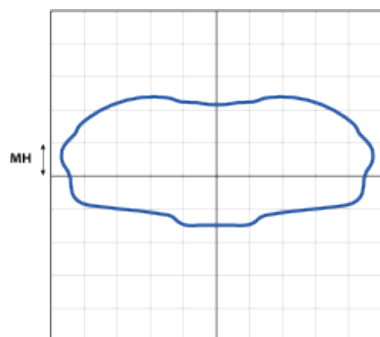


Type 2R

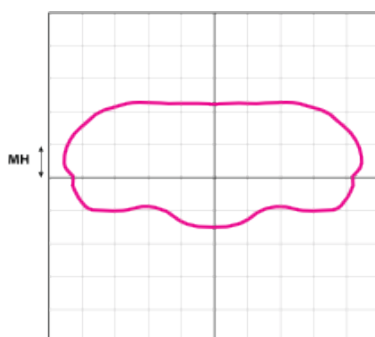


Type 2S

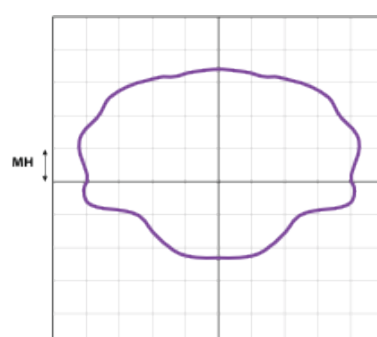


Type 3F

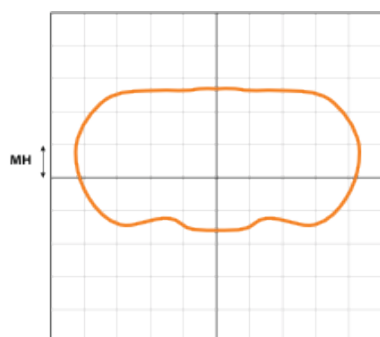

Type 3R

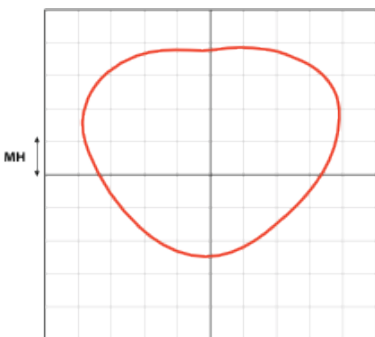

Type 4

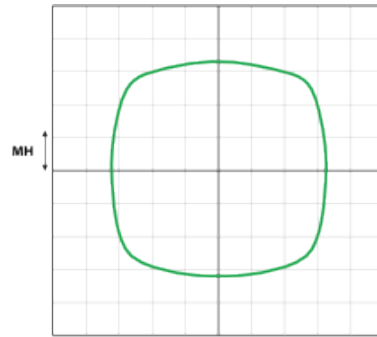

Type 5

LEOLink ILS™ Intelligent Lighting System for Tomorrow's Smart & Sustainable Cities

Smart...Scalable...Effortless

LEOLink ILS is the next evolution in street lighting, integrating AI and IoT to transform a city's traditional outdoor lighting infrastructure into a smart, adaptive network. It empowers municipalities and utilities with real-time control, predictive maintenance, and rapid scalability, all with unmatched simplicity.

Integrating LEOTEK's AI-driven centralized management platform (LEOLink RenAI) with intelligent streetlight controllers, LEOLink ILS provides 24x7 visibility into the status and performance of streetlights enabling efficient energy use, real-time fault detection, and predictive maintenance across city-wide lighting networks. Easy "plug-and-play" deployment and scalability support users in achieving operational excellence, public safety, and long-term sustainability. With LEOLink ILS, cities are creating the backbone of a future-ready smart city.

Key Functions

Centralized, Remote Management

Gain complete control of your city's smart lighting infrastructure from a single, intuitive platform.

Instant Response to Anomalies

Automatically identify and respond to abnormal lighting behavior in real-time.

AI-Powered Predictive Maintenance

Detect and address faults before they occur, minimizing downtime and maintenance costs.

Actionable Insights Through Data Visualization

Monitor asset performance and energy trends with clear, interactive dashboards and reports.

Energy Efficiency & Cost Savings

Optimize energy usage with intelligent scheduling and dimming, reducing operational expenses.

LEOLink Controllers Key Features & Benefits

The smartest fit for 7-PIN NEMA fixtures. Engineered to deliver seamless performance, trusted security, and plug-and-play simplicity, all in one powerful, next-generation controller.



Self-Monitoring & Fault Detection

Controllers continuously monitor the luminaire's operational status, identifying power outages, failures, and abnormal energy patterns for fast diagnostics and improved maintenance efficiency.



Ultra-High Connectivity

Dual-mode cellular communication using the world's most reliable and secure carriers ensures a 99.5% connection success rate, delivering reliable continuous data transmission even in challenging environments.



Built-In Surge Protection

Advanced surge protection against lightning and voltage spikes safeguards critical streetlight infrastructure.



AI-Driven Adaptive Dimming

Participates with LEOLink RenAI to enable intelligent dimming strategies, including human-centric lighting adjustments based on real-time traffic, weather, and pedestrian activity.



Predictive Maintenance & Analytics

Advanced failure analysis and predictive diagnostics move cities from reactive to preventative maintenance strategies that reduce downtime and operational costs.



*LEOLink 'NB01P05/10'
Smart Controller

LEOLink RenAI Central Management System Key Features & Benefits

RenAI is an AI-powered, cloud-based Central Management System (CMS) that turns streetlighting into a dynamic, adaptive, and self-optimizing network. Using a native AI foundation, it analyzes both real-time and historical data—surpassing traditional CMS capabilities—to address the complex needs of modern roadway infrastructure. The result: improved energy efficiency, reduced operational costs, and enhanced public safety for utilities and municipalities.



LiSA (LEOTEK intelligent Service Advisor)

LiSA, our AI-powered assistant, is available 24/7 to streamline operations, quickly answering questions, generating charts and tables, and assisting with troubleshooting to lighten your team's workload.



Asset Management

Collect and track roadway infrastructure asset information such as streetlight fixtures, poles and controllers to drive operational efficiencies from field maintenance to life cycle management.



Remote Control

Remotely switch lights ON/OFF and adjust brightness via an intuitive user interface.



Fault Detection & Notification

Monitor streetlight health and status in real time to detect and receive instant fault alerts.



Energy Consumption Management

Track usage, identify trends, and forecast energy needs for optimal efficiency.



Data Analysis & Reporting

Access historical insights, visualize data, and generate reports for informed decision-making.



Scheduled Dimming

Automatically adjusts brightness levels based on ambient light and pre-set schedules.



LEOLink Intelligent Lighting System (ILS) Ordering Information* (*add to end of luminaire catalog number to ship controller with the luminaire)

Sample Catalog No. Luminaire w/ Controller: GCL1-80J-MV-30K-2S-GY-185-PCR7-CR-BABA-**NB01P10-R10-D10** (controllers will ship included with the luminaire)

Sample Catalog No. for Controller Only: **NB01P05-R05-D05** (controllers will ship separately from the luminaire)

LEOLink Smart Controllers		RenAI CMS Subscription		Network Data Plan	
NB01P05 ¹	LEOLink 7-PIN Controller, 5YR Warranty (120-277V)	R01	RenAI, One Year SaaS Subscription	D01	Data Plan, One Year Subscription
NB01P10 ¹	LEOLink 7-PIN Controller, 10YR Warranty (120-277V)	R05	RenAI, Five Year SaaS Subscription	D05	Data Plan, Five Year Subscription
		R10	RenAI, Ten Year SaaS Subscription	D10	Data Plan, Ten Year Subscription
		R00 ²	RenAI, No SaaS Subscription	D00 ²	Data Plan, No Subscription

1. For each controller, a RenAI CMS Subscription 'RXX' and Network Data Plan 'DXX' is required. Please refer to the LEOLink ILS specification sheets and ordering guide for complete ordering and specification details.

2. 'R00' and 'D00' options require prior approval from LEOTEK. Please contact factory for details.