

VersaTEK Medium

LED Site & Area
Series

Versatility by Design

The VersaTEK Medium LED Site & Area Series is the perfect blend of architectural design, power, performance and reliability with a simple retrofit friendly design delivering up to 36,000 lumens while weighing less than 20 lbs.

For end users looking for value friendly initial costs combined with significant energy & maintenance savings resulting in ~70-80%+ combined savings over the course of its installed life versus traditional HID luminaires, VersaTEK's Site & Area Series is your clear choice for optimal payback & ROI.

With a clean free flowing low profile design, the pole arm mount blends seamlessly into any environment or application. Performance factory rotatable optics & multiple field installable shield options allows for extremely uniform illumination that looks amazing while providing visual safety & trespass control for demanding installations.

Pair this with a wide range of fixture & control options which includes motion sensors, DALI D4i drivers, D4i receptacle options and part night dimming control capabilities in an easy to retrofit lightweight design for safe & quick single-person installation.

Key Features, Details & Specs


- 8,878 to 51,526 lumens w/ efficacies up to 189+ LPW
- True 250-750 watt HID replacement (70%+ energy savings)
- Performance Selector option for field adjustment of wattage & lumens
- LEOLink ILS™ Intelligent Lighting System & wireless 'NB01P' smart controller option
- Next-gen performance LED platform, Site & Area, Roadway optics & shielding
- 2700K, 3000K, 4000K & 5000K CCT options available
- Weighs 27 to 28 lbs. for easy & safe single person installation
- 10kV integral surge standard, 20kV extreme surge option available
- Entire luminaire & optical assembly is rated IP66
- 50°C (122°F) high-ambient rating is standard
- Pass-thru convective cooling & integral thermal heatsink design
- A360 die-cast low copper content alloy (< 0.6%)
- 5,000-hour salt spray finish standard (*coastal finish available*)
- All exposed fasteners are stainless steel & captive
- 3G vibration rated suitable for high winds, overpasses, bridges, etc.
- Tool-free access w/ optional tool-free removable 'Power Door'
- Tested before & after rigorous 2-hour burn-in cycle
- Assembled in the USA at LEOTEK's San Jose, CA facility



Typical Applications

Industrial & Stadium Parking
Commercial & Retail Parking
Military Bases
Business Parks
College Campuses
Automotive Dealerships

'SPM' square pole arm mount

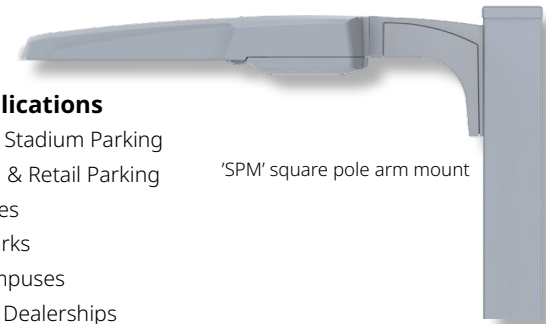

Integral Tool-Free Access Design

Tool-free electrical access & removable hinged door w/ fixed open door prop design for ease of installation or maintenance (compatible w/ most lineman safety gloves)




Hassle Free Installation & Maintenance Features

Optional terminal block, a self-centering mast arm 'star' design assists with leveling to a tenon and a retrofit friendly quick mount pole arm (pole arm mount retrofits up to 5.25" bolt spacing for easy single person no drill install)



Tool-Free Removable Power Door Option

All serviceable electrical components mounted to a Power Door that is accessed & removable without tools in less than 15 seconds (undo MOLEX connectors, push two spring clips to unlock door, slide forward to remove)



VersaTEK Medium

LED Site & Area Series



'MAF' mast arm fitter mount

Ordering Information

Sample Catalog No. VTMSA-144A-MV-40K8-T3R-WH-CF-P4-SPM-D4I-TLR4U-TB-SP2-WL1-PWRD-SF277

Product	LED Code	Voltage	Color Temp CRI	Optical Distribution	Finish*	Performance Code	Mounting Options				
VTMSA VersaTEK Medium Site & Area	144A 144 LEDs Gen-A	MV 120-277V HV 347-480V	27K7	2700K, 70CRI	NR	Narrow Roadway	BK	Black	P1	SPM	Universal Square Pole Arm Mount
			30K7	3000K, 70CRI	MR	Medium Roadway	DB1	Dark Bronze (RAL8019)	P2	RPM	Universal Round Pole Arm Mount
			40K7	4000K, 70CRI	WR	Wide Roadway	WH	White	P3	MAF	Horizontal Mast Arm Fitter (compatible w/ 1-5/8", 2-3/8" and 3" O.D. tenons)
			50K7	5000K, 70CRI	T2R	Type-2R	GY	Gray	P4		
					T2F	Type-2F			P5	WM	Wall Mount Fixed (compatible w/ 3" & 4" square/octagonal recessed J-boxes)
			30K8 ¹	3000K, 80CRI	T3R	Type-3R			P6		
			40K8 ¹	4000K, 80CRI	T3F	Type-3F	CF	Coastal Finish	P7	WMSC	Wall Mount Fixed w/ Surface Conduit J-Box
			50K8 ¹	5000K, 80CRI	T4R	Type-4R			P8		
					T4F	Type-4F			P9		
					T5	Type-5			P10	AWM	Adjustable Wall Mount (compatible w/ 3" & 4" square/octagonal recessed J-boxes)
					AFR	Auto Front Row			P11	AWMSC	Adjustable Wall Mount w/ Surface Conduit J-Box
					ORR	Optics Rotated Right			P12		
					ORL	Optics Rotated Left			P13	ASPM	Universal Square Pole Adjustable Arm Mount
							ARPM	Universal Round Pole Adjustable Arm Mount			
							P14				

Driver* & Control Options (*0-10V drivers are standard)		General Options	
D4I ^{2,5}	DALI D4i Driver	TFL	Tamper free latch (driver electrical door)
TLR4U ^{2,3,6}	DALI 4-PIN Twist Lock Receptacle (upper of housing receptacle location)	TB	3-position Terminal Block
TLR4L ^{2,3,6}	DALI 4-PIN Twist Lock Receptacle (lower driver door receptacle location)	SP2 ¹¹	20kV/10kA Extreme Surge, Fail-to-On
NB01P ^{2,4}	LEOLink 7-PIN Smart Controller (120-277V)	LSSP2	20kV/10kA Extreme Surge, Fail-to-Off
PCR7CR ^{2,9}	ANSI 7-wire Control Ready Receptacle	WL	Wattage Label, ANSI C136.15-2015 compliant
SC	Shorting Cap (factory installed)	WL1	Wattage Label, ANSI C136.15-2020 compliant
LLPC ⁵	Long Life Photocontrol	DSC	Optional Driver Door Safety Cable
PS ⁶	Field Adjustable Performance Selector	PWRD	Power Door Option (tool-free removable door w/ serviceable electrical items)
PND1 ⁷	Part Night Dimming V1	SFXXX ¹²	Single Fuse ('XXX' = specify 120, 277, 347V)
PND2 ⁷	Part Night Dimming V2	DFXXX ¹²	Double Fuse ('XXX' = specify 208, 240, 480V)
PND3 ⁷	Part Night Dimming V3	BLS ¹³	Enhanced Back Light Shield (factory installed)
MSL3 ^{8,9}	Motion Sensor w/ L3 Lens	VHS	80 Degree Cutoff Shield (factory installed)
MSL7 ^{8,9}	Motion Sensor w/ L7 Lens	FSS ¹³	Front Side Shield (factory installed)
MSL3P ^{8,10}	Motion Sensor w/ L3 Lens w/ PCR7	CSS ¹³	Cul-de-sac Shield (factory installed)
MSL7P ^{8,10}	Motion Sensor w/ L7 Lens w/ PCR7		

1. 80CRI option only available in 3000K, 4000K & 5000K CCTs and may have longer leadtimes (contact factory).
2. For full 100% D4i DALI functionality a 'PCR7CR', 'TLR4U' or 'TLR4L' must be selected w/ 'D4I' DALI driver option. DALI compatible node or sensor (by others). 'D4I' DALI driver not compatible w/ 'NB01P' smart controller.
3. 'TLR4U' & 'TLR4L' twist lock receptacle options requires 'D4I' driver option to be selected.
4. 'NB01P' requires 'PCR7CR' option, only available in 'MV' 120-277V (contact factory for 'HV' 347-480V availability). 'NB01P' is a cellular based NEMA 7-PIN Smart Controller, 10-YR data (200MB), RenAI subscription included.
5. 'LLPC' requires 'PCR7CR' option to be selected (does not ship installed, included w/ luminaire). 6. 'PS' Performance Selector enables field adjustable light output dimming control from specified Performance Code, not compatible with DALI driver option.
7. 'PND' options only available w/ 'MV' 120-277V (contact factory for 'HV' 347-480V availability). 8. Motion Sensor options only available w/ 'SPM', 'RPM', 'MAF', 'WM' and 'WMSC' horizontal mounting options.
9. 'MSL3', 'MSL7' motion sensors require secondary controls for ON/OFF capability (ex. time clock or 0-10V by others). Contact factory for Motion Sensor availability w/ 'PCR7CR' control ready receptacle for use with wireless 7-PIN control node (by others).
10. 'MSL3P', 'MSL7P' motion sensors includes a PCR7 photocontrol receptacle for use with a twist lock photocontrol for ON/OFF capability (for use with our 'LLPC' or photocontrol by others, PINs 6 & 7 are not wired for controls, not compatible w/ wireless nodes).
11. 10kV/5kA surge, fail-to-on is included standard ('SP1'). 12. For single or double fusing, 'XXX' must specify required voltage. 13. 'BLS-VTM', 'FSS-VTM' and 'CSS-VTM' shields are not available for use with the 'T5' Type-5 optical distribution.
14. Denotes 'NB01P' Smart Controllers will ship bulk or master pack and ships separately from the luminaire.

Nominal Performance Data 4000K & 5000K


(IES Type-2R optic, 70CRI, 25°C ambient)

Performance Code	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14
Lumens ¹	11,105	14,248	17,389	20,660	23,688	26,646	29,537	32,357	35,084	37,908	42,047	44,741	47,383	51,249
System Wattage (W)	59	77	94	111	126	143	160	178	203	219	242	260	279	307
Efficacy (Lm/W)	188	185	185	186	188	186	185	182	173	173	174	172	170	167
HID Replacement	150W	175W	250W	400-750W									1000W	

1. Normal tolerance $\pm 10\%$ due to factors including distribution type, LED bin variance, driver variance and ambient temperatures.

'SPM' Square Pole Arm Mount Dimensions

Can retrofit up to 5.25" max. bolt spacing w/ no drilling required

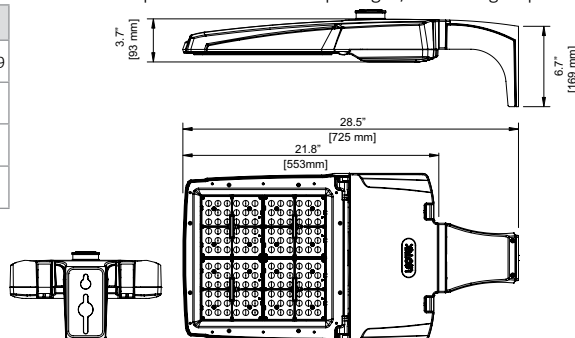

* Please refer to VersaTEK product specification sheets for additional ordering information & product details *