

VersaTEK Medium

LED Floodlight Series



Versatility by Design

The VersaTEK Medium Flood is an extremely durable & performance focused solution for both specification & budget minded applications for demanding Utility, Municipality, DOT & Commercial project applications.

A value-driven solution for any flood application where the VersaTEK Flood's product reliability & performance is paired with lineman-friendly installation & hassle-free maintenance design to help provide the lowest total cost of ownership possible over an expected installed service life of 10-20 years.

Whether you need to light a loading dock, large open spaces, or accent a building facade or structure like a bridge, the VersaTEK Flood has a wide range of mounting and performance optical solutions to get the job done right. Three slipfitters, yoke, trunnion and adjustable wall or direct to pole mounting options coupled with a wide selection of all-purpose & performance flood optics to design with, making this floodlight ideal for new construction or as a retrofit solution providing ~70-80%+ in combined energy & maintenance savings vs. legacy HID alternatives.

Key Features, Details & Specs

- 8,399 to 42,305 lumens with efficacies up to 178+ LPW
- True 250-750 watt HID replacement (70%+ energy savings)
- Performance Selector option for field adjustment of wattage & lumens
- LEOLink ILS™ Intelligent Lighting System & wireless 'NB01P' smart controller option
- Next-gen performance LED platform, Flood optics & shielding
- 2700K, 3000K, 4000K & 5000K CCT options available
- Weighs only 28-31 lbs. for easy & safe single person installation
- Tool-free access with optional tool-free removable 'Power Door'
- 10kV integral surge standard, 20kV extreme surge option available
- Entire luminaire & optical assembly is rated IP66
- 50°C (122°F) high-ambient rating is standard
- Pass-thru convective cooling & integral thermal heatsink design
- IK10 rated design with IK10 rated glass lens
- A360 die-cast low copper content alloy (< 0.6%)
- 5,000-hour salt spray finish standard (coastal finish available)
- 3G vibration rated suitable for high winds, overpasses, bridges, etc.
- Tested before & after rigorous 2-hour burn-in cycle
- BAA compliant, BABA option available, assembled in the USA (San Jose, CA)
- LEOTEK factory 10-year warranty is standard



'SF' slipfitter mount

Typical Applications

Electrical Substations
Water Treatment Facilities
Rail & Intermodal Yards
Storage Yards
Loading Docks
Prisons
Bridges
Facades & Large Structures

Integral Tool-Free Access Design

Tool-free electrical access & removable hinged door w/ fixed open door prop design for ease of installation or maintenance (compatible w/ most lineman safety gloves)



Hassle Free Installation & Maintenance Features

Optional terminal block, slipfitter w/ self-centering 'star' design assists with leveling to a tenon and a UL recognized splice compartment ('SF' option splice compartment w/ 5-wire lead access & WAGOs for ease of installation, eliminates the need for a secondary j-box, compatible w/ 1-5/8", 2-3/8" & 3" O.D. tenons)



Tool-Free Removable Power Door Option

All serviceable electrical components mounted to a Power Door that is accessed & removable without tools in less than 15 seconds (undo MOLEX connectors, push two spring clips to unlock door, slide forward to remove)



VersaTEK Medium LED Floodlight Series

'TR' trunnion mount

'YK' yoke mount



Ordering Information

Sample Catalog No. VTMFL-144A-MV-40K7-N66-GY-CF-P9-SFH-PCR7CR-TB-WL1-SP2-SF120-BABA

Product*	LED Code	Voltage	Color Temp CRI	Optical Distribution	Finish*	Performance Code*	Mounting Options
VTMFL VersaTEK Medium Flood	144A 144 LEDs Gen-A	MV 120-277V HV 347-480V	27K7 2700K, 70CRI 30K7 3000K, 70CRI 40K7 4000K, 70CRI 50K7 5000K, 70CRI 30K8 ¹ 3000K, 80CRI 40K8 ¹ 4000K, 80CRI 50K8 ¹ 5000K, 80CRI	N66 NEMA 6Hx6V Flood S33 NEMA 3Hx3V Spot NSP Narrow Spot RN Rectangular Narrow RM Rectangular Medium RW Rectangular Wide WG Wall Grazer	BK Black DB1 Dark Bronze (RAL8019) WH White GY Gray CF Coastal Finish *Consult factory for custom finish options, pricing & leadtimes.	P1 P2 P3 P4 P5 P6 P7 P8 P9 P10 P11 P12 *Refer to spec sheet for details	SF ² Slipfitter w/ Wire Leads (in UL splice compartment) SFH ³ Slipfitter w/ S/O Cord Exiting Housing Bottom (3-wire S/O cord, 16AWG, 4' exit length) SFC ³ Slipfitter w/ S/O Cord Exiting Center of Fitter (3-wire S/O cord, 16AWG, 4' exit length) TR ³ Trunnion Mount (3-wire S/O cord, 16AWG, 4' exit length) YK ³ Yoke Mount (3-wire S/O cord, 16AWG, 4' exit length) AWM Adjustable Wall Mount (compatible w/ 3" & 4" square/octagonal recessed J-boxes) AWMSC Adjustable Wall Mount w/ Surface Conduit J-Box ASPM Universal Square Pole Adjustable Arm Mount ARPM Universal Round Pole Adjustable Arm Mount

*If Build America, Buy America Act (BABA) compliance is required, please refer to 'BABA Domestic Build Option' located under 'General Options' and refer to footnote #15 for additional details.

Driver* & Control Options (*0-10V drivers are standard)		General Options	
D4I ^{4,8} TLR4U ^{4,5,8} TLR4L ^{4,5,8}	DALI D4I Driver DALI 4-PIN Twist Lock Receptacle (upper housing receptacle location) DALI 4-PIN Twist Lock Receptacle (lower driver door receptacle location)	AIM45 ¹⁰ SS TFL TB ² SP2 ¹¹ LSSP2 WL WL1 DSC PWRD SFXXX ¹² DFXXX ¹² SWSO ¹³ SOXXYY ¹⁴	Slipfitter Factory Pre-aimed at 45° Slipfitter Set Screw (replaces standard slipfitter set bolts) Tamper free latch (driver electrical door) 3-position Terminal Block 20kV/10kA Extreme Surge, Fail-to-On 20kV/10kA Extreme Surge, Fail-to-Off Wattage Label, ANSI C136.15-2015 compliant Wattage Label, ANSI C136.15-2020 compliant Optional Driver Door Safety Cable Power Door Option (tool-free removable door w/ serviceable electrical items) Single Fuse ('XXX' = specify voltage 120, 277, 347V) Double Fuse ('XXX' = specify voltage 208, 240, 480V) 5-wire S/O Cord (16AWG, 4' length w/ dimming leads) Special S/O AWG & Cord Length in Feet ('XX' = specify AWG 12, 14 or 16) (*YY' = specify S/O cord length 06, 08, 10, 15, 25)
PCR7CR ^{4,9} SC LLPC ⁶ PS ⁷ PND1 ⁸ PND2 ⁸ PND3 ⁸	ANSI 7-wire Control Ready Receptacle Shorting Cap (factory installed) Long Life Photocontrol Field Adjustable Performance Selector Part Night Dimming V1 Part Night Dimming V2 Part Night Dimming V3	BABA ¹⁵	Build America, Buy America Act Compliant (meets Oct. 1, 2026 final US assembly, 55% content material requirements)
LEOLink ILS™ Intelligent Lighting System* * See VTMFL specification sheet for LEOLink ordering & system details * (refer to LEOLink ILS specification sheets for complete specification & ordering information)		BABA Domestic Build Option	

General Accessories*	
TBS-VTM LRS-VTM 4SS-VTM BDS-VTM VS-VTM WG-VTM BSK	Shield Accessories Top, Bottom Shield Left, Right Side Shield 4-sided Shield Barn Door Shield Poly Vandal Shield Wire Guard Bird Deterrent Spider Kit
LLPCMV LLPCHV	Controls Accessories Long Life Photocontrol MV Long Life Photocontrol HV
*Accessories are ordered & shipped separately, not to be included in the luminaire's catalog number. (requires field installation)	

1. 80CRI option only available in 3000K, 4000K & 5000K CCTs and may have longer leadtimes (contact factory).
2. 'TB' Terminal Block is not available for use with the 'SF' Slipfitter mounting option. 3. Mounting option includes 16AWG 3-wire S/O cord w/ a 4' exit length & last 6" of insulation removed.
4. For full 100% D4I DALI functionality a 'PCR7CR', 'TLR4U' or 'TLR4L' must be selected w/ 'D4I' DALI driver option. DALI compatible node or sensor (by others). 'D4I' DALI driver not compatible w/ 'NB01P05/10' smart controller.
5. 'TLR4U' & 'TLR4L' twist lock receptacle options require 'D4I' DALI driver option to be selected.
6. 'LLPC' requires 'PCR7CR' option to be selected (does not ship installed, ships included w/ luminaire).
7. 'PS' Performance Selector enables field adjustable light output dimming control from specified Performance Code, not compatible with DALI driver option.
8. 'PND' options only available w/ 'MV' 120-277V (contact factory for 'HV' 347-480V availability).
9. 'NB01P05/10' requires 'PCR7CR' option, only available in 'MV' 120-277V (contact factory for 'HV' 347-480V). 'NB01P05/10' is a cellular based NEMA 7-PIN Smart Controller, RenAI subscription and network data plan required (see spec sheet for details).
10. Slipfitter options 'SF', 'SFC', 'SFH' ship pre-aimed at 45° from the factory if 'AIM45' is specified. 11. 10kV/5kA surge, fail-to-on is included standard ('SP1'). 12. For single or double fusing, 'XXX' must specify required voltage.
13. 'SWSO' only available with 'SFC', 'SFH', 'TR' & 'YK' mounting options. Not available w/ 'PCR7CR', 'PS', 'PND', 'D4I', 'TLR4U', 'TLR4L' options. 14. 'SOXXYY' option, 'XX' & 'YY' must specify S/O cord AWG & length (only available w/ S/O cord mounting options).
15. 'BABA' option must be specified to meet Oct. 1, 2026 Build America, Buy America Act (BABA) guidelines. Failure to specify the 'BABA' ordering code will result in receiving non-BABA compliant product (w/ no recourse for an RMA, product exchange or refund).

Nominal Performance Data 4000K & 5000K


(NEMA 6x6 optic, 70CRI, standard IK10 rated glass lens, 25°C ambient)

Performance Code	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
Lumens ¹	10,500	13,472	16,442	19,535	22,399	25,197	27,929	30,596	33,174	35,844	39,758	42,305
System Wattage (W)	59	77	94	111	126	143	160	178	203	219	242	260
Efficacy (Lm/W)	178	175	175	176	178	176	175	172	163	164	164	163
HID Replacement	150W	175W	250W	400-750W								

1. Normal tolerance ± 10% due to factors including distribution type, LED bin variance, driver variance and ambient temperatures.

'SF' Slipfitter Mount Dimensions*

(5-wire leads in UL splice compartment, shown w/ optional 'PCR7CR')

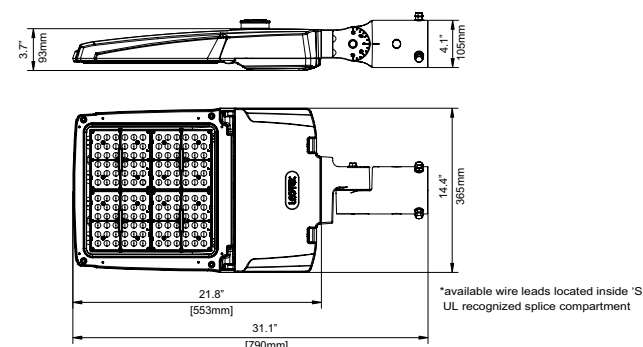

* Please refer to VersaTEK product specification sheets for additional ordering information & product details *

