



# GreenCobra™ LED Street Light

## GC1 F-Series Specification Data Sheet

Project  
Type  
Catalog No.

### Luminaire Data

**Weight** 21 lbs [9.5 kg]  
**EPA** 0.67 ft<sup>2</sup>

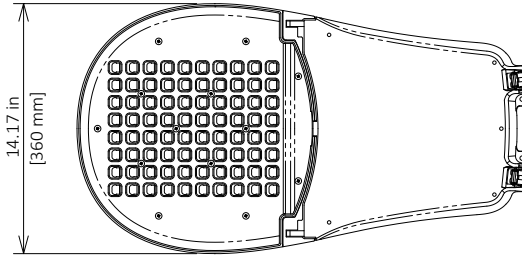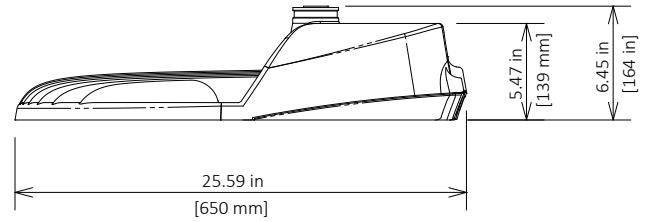

### Ordering Information

Sample Catalog No. GC1-60F-MV-NW-2-GY-FDC350

Product	No. & Type of LEDs	Voltage	Color Temperature	Distribution	Finish <sup>1</sup>	Drive Current <sup>2</sup>	Options
<b>GC1</b>	<b>20F</b>	<b>MV</b> 120-277V	<b>WW</b> 3000K	<b>2</b> Type 2	<b>GY</b> Gray	<b>350</b> 350mA	<b>HSS</b> <sup>4</sup> House Side Shield (Factory Installed)
	<b>30F</b>	<b>HV</b> 347-480V	<b>NW</b> 4000K	<b>3</b> Type 3	<b>DB</b> Dark Bronze	<b>530</b> 530mA	<b>FDC</b> <sup>5</sup> Fixed Drive Current
	<b>40F</b>		<b>CW</b> 5000K		<b>700</b> 700mA	<b>FFA</b> <sup>6</sup> Full Field Adjustability	
	<b>60F</b>				<b>1A</b> <sup>3</sup> 1A	<b>LPCR</b> Less Photocontrol Receptacle	
	<b>80F</b>					<b>PCR7</b> ANSI 7-wire Photocontrol Receptacle	
						<b>PCR7-CR</b> <sup>7</sup> Control Ready 7-wire Photocontrol Receptacle	
						<b>SC</b> PCR Shorting Cap	
						<b>WL</b> Utility Wattage Label	

Notes:

- Gray, Black and Dark Bronze standard, consult factory for other finishes.
- Specified drive current code is the factory set maximum drive current. Field adjustable current selector enables standard dimming to lower wattage drive currents only. Consult factory if wattage limits require a special drive current
- 1A drive current only available with 40F. Specify 1A maximum at time of order.
- Flush mounted house side shield factory installed. Shield cuts light off at 1/2 mounting height behind luminaire.
- Non-field adjustable, fixed drive current. Specify required drive current. Not available with PCR7-CR option.
- The FFA option enables full field adjustability from the specified drive current code to all drive currents available. This option is not DLC qualified.
- Control-ready wired at factory for wireless node dimming. Supplied at maximum drive current. If lower drive current is required, consult factory.
- Flush mounted house side shield. Shield cuts light off at 1/2 mounting height behind luminaire. Specify Model and Color.
- Specify Color (GY, DB, BK)
- Specify MV (120-277V) or HV (347V-480V)

### Accessories\*

<b>HSSGC1</b> <sup>8</sup>	House Side Shield
<b>SPB</b> <sup>9</sup>	Square Pole Horizontal Arm Bracket
<b>RPB</b> <sup>9</sup>	Round Pole Horizontal Arm Bracket
<b>PTB</b> <sup>9</sup>	Pole Top Tenon Horizontal Arm Bracket
<b>PTB2</b> <sup>9</sup>	Pole Top Tenon Horizontal Arm Bracket (2@180°)
<b>WB</b> <sup>9</sup>	Wall Horizontal Arm Bracket
<b>BSK</b>	Bird Deterrent Spider Kit
<b>LLPC</b> <sup>10</sup>	Long-Life Twist Lock Photocontrol
<b>SC</b>	Twist Lock Shorting Cap

\*Accessories are ordered separately and not to be included in the catalog number

### Luminaire Specifications

#### Housing

Die cast aluminum housing with universal four-bolt slip fitter mounts to 1-1/4" to 2" (1-5/8" to 2-3/8" O.D.) diameter mast arm. Aluminum housing provides passive heat-sinking of the LEDs and has upper surfaces that shed precipitation. Mounting provisions meet 3G vibration per ANSI C136.31-2010 Normal Application, Bridge & Overpass. Mounting has leveling adjustment from + 10° to -5° in 2.5° steps and integral bubble level standard. Electrical components are accessed without tools and are mounted on removable power door with stainless steel latches. Standard rubber wildlife guard conforms to mast arm with no gaps.

#### Light Emitting Diodes

Hi-flux/Hi-power white LEDs produce a minimum of 90% of initial intensity at 100,000 hours of life based on IES TM-21. LEDs are tested in accordance with IES LM-80 testing procedures. LEDs have correlated color temperature of 3000K (WW), 4000K (NW), or 5000K (CW) and 70 CRI minimum. LEDs are 100% mercury and lead free.

#### Field Adjustability

LED drive current can be changed in the field to adjust light output for local conditions (not available with PCR7-CR option). The specified drive current code will be the factory set maximum drive current and field adjustments can only be made to available lower wattage drive currents. Select the FFA option if full field adjustability to all available drive currents (700mA max or 1A max) is desired. The FFA option is not DLC qualified.

#### Quality Control

Every luminaire is performance tested before and after a 2-hour burn-in period. Assembled in the USA.

#### Optical Systems

Micro-lens optical systems produce IESNA Type 2 or Type 3 distributions and are fully sealed to maintain an IP66 rating. Luminaire produces 0% total lumens above 90° (BUG Rating, U=0). Optional house side shield cuts light off at 1/2 mounting height behind luminaire.

#### Electrical

Rated life of electrical components is 100,000 hours. Uses isolated power supply that is 1-10V dimmable. Power supply is wired with quick-disconnect terminals. Power supply features a minimum power factor of .90 and <20% Total Harmonic Distortion (THD). EMC meets or exceeds FCC CFR Part 15. Terminal block accommodates 6 to 14 gauge wire and is aligned for strait wire entry. Surge protection complies with IEEE/ANSI C62.41 Category C High, 20kV/10kA.

#### Controls

3-Wire photocontrol receptacle is standard. ANSI C136.41 7-wire (PCR7) photocontrol receptacles are available. All photocontrol receptacles have tool-less rotatable bases. Wireless control module is provided by others.

#### Finish

Housing receives a fade and abrasion resistant polyester powder coat finish. Finish tested to withstand 3000 hours in salt spray exposure per ASTM B117. Finish tested 500 hours in UV exposure per ASTM G154 and meets ASTM D523 gloss retention.

#### Listings/Ratings/Labels

Luminaires are UL listed for use in wet locations in the United States and Canada. DesignLights Consortium™ qualified 120-277V 4000K product. Refer to DLC web site for specific DLC listed models. International Dark Sky Association listed. Luminaire is qualified to operate at ambient temperatures of -40°C to 40°C.

#### Photometry

Luminaires photometrics are tested by certified independent testing laboratories in accordance with IES LM-79 testing procedures. IES files for all CCTs are available at leotek.com.

#### Warranty

10-year limited warranty is standard on luminaire and components.

### Performance Data

All data nominal. IES files for all CCTs are available at leotek.com.

No. of LEDs & Type	Drive Current (mA)	System Wattage (W)	Delivered Lumens (Lm) <sup>1</sup>	Efficacy (Lm/W)	Type 2	Type 3
					BUG Rating	BUG Rating
20F	350	25	2700	108	B1 U0 G1	B1 U0 G1
	530	35	3650	104	B1 U0 G1	B1 U0 G1
	700	47	4800	102	B1 U0 G1	B1 U0 G1
30F	350	35	3800	109	B1 U0 G1	B1 U0 G1
	530	53	5400	102	B1 U0 G1	B2 U0 G1
	700	70	7000	100	B2 U0 G2	B2 U0 G2
40F	350	45	5050	112	B1 U0 G1	B2 U0 G1
	530	70	7200	103	B2 U0 G2	B2 U0 G2
	700	92	9300	101	B2 U0 G2	B2 U0 G2
40F (1A Maximum)	530	70	7200	103	B2 U0 G2	B2 U0 G2
	700	92	9300	101	B2 U0 G2	B2 U0 G2
	1000	132	12300	93	B3 U0 G3	B3 U0 G3
60F	350	70	7600	109	B2 U0 G2	B2 U0 G2
	530	101	10400	103	B2 U0 G2	B2 U0 G2
	700	133	13400	101	B3 U0 G3	B3 U0 G3
80F	350	85	9500	112	B2 U0 G2	B2 U0 G2
	530	133	14200	107	B3 U0 G3	B3 U0 G3
	700	180	17700	98	B3 U0 G3	B3 U0 G3

Notes:

1 All data nominal lumens for 4000K (NW) and 5000K (CW). For 3000K (WW) apply a LLF of 0.93. Normal tolerance ± 10% due to factors including distribution type, LED bin variance, and ambient temperatures.